


## LATHE OPTIMUM TU 2004V

Reference: 0500P0310

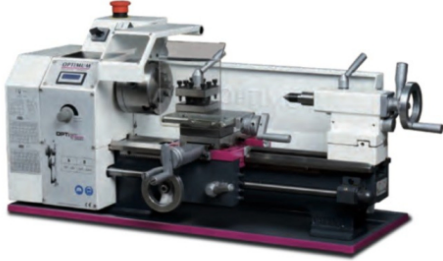

## LATHE OPTIMUM TU 2004V

LATHE OPTIMUM TU 2004V with continuous speed adjustment and digital display.

### TECHNICAL FEATURES OF THE OPTIMUM TU 2004V LATHE

Product type : Lathe  
Tip height: 100 mm  
Diam. turning on pallet: 200mm  
Distance between points: 300 mm  
Spindle speed, infinitely adjustable: 150 - 2500 rpm  
Lathe speed number: 2  
Spindle cone: cm 3  
Bar passage: diam. 21 cm  
Pallet width: 100 mm  
Upper slide stroke: 55 mm  
Cross slide stroke: 75 mm  
Tailstock cone: cm 2  
Tailstock-tailstock stroke: 65 mm  
Longitudinal lathe feed: 0.1 to 0.2 mm/revolution  
Metric threading: from 0.25 to 3 mm/revolution  
Thread inches: 44 - 8 threads/1".  
Length: 830 mm  
Width: 425 mm  
Height: 360 mm  
Weight: 61 Kg.  
lathe motor power: 600 W 230 V - 50 Hz

images and technical data not binding

### Technical Sheet

Phase	Single phase
Frequency (Hz)	50
Voltage (V)	230
Power (KW)	0.6
Length (mm)	830

---

Width (mm)	425
Height (mm)	360
Product type	Lathe
Weight (Kg)	61

---