


OPTIMUM TU 2506 400V PARALLEL LATHE WITH FEED GEAR BOX

Reference: 0500P5003

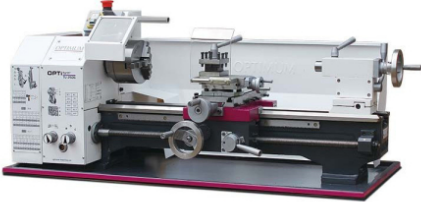

OPTIMUM TU 2506 400V PARALLEL LATHE CONTINUOUS SPEED CONTROL

Optimum TU 2506 is a parallel lathe equipped with a powerful 750 W 400 V motor which allows a spindle speed between 125 and 2000 rpm.

The adjustable number of revolutions allow a perfect selection based on the processing and malleability of the metal.

The prismatic bed, in gray cast iron with reinforcement ribs, is induction hardened and precision ground, which gives the machine greater solidity and stability.

Provides excellent machining accuracy with concentric rotation of the spindle nose & It; 0.009 mm and self-centering concentric rotation & It; 0.04 mm. The graduated handwheel also allows fine adjustments, division 0.04 / 0.01 mm.

TECHNICAL FEATURES OPTIMUM TU 2506

Motor power: 400V - 0,75Kw - 50Hz
Center height: 125mm
Turning diameter on bed: Ø 250mm
Distance between centers: 550mm
Spindle speed: 125/2000 rpm
Number of speeds: 6
Spindle cone: CM 4
Bar passage: Ø 26mm
Bed width: 135mm
Upper slide stroke: 70mm
Cross slide travel: 110mm
Tailstock cone: CM2
Tailstock-quill travel: 65mm
Longitudinal feed: 0.07 / 0.4mm / rev
Metric pitch thread: 0 , 2 / 4mm / rev
Inch thread: 56/8 thread / 1 "
Width: 1250 mm
Length: 585 mm
Height: 475 mm
Net weight : 125 kg

Are you looking for a different product? Find the right product for you on our website Manelservice.com

The images and technical data are not binding and may be subject to revisions by the manufacturer.

Technical Sheet

Phase	Three phase
Frequency (Hz)	50
Voltage (V)	400
Power (KW)	0.75
Length (mm)	585
Width (mm)	1250
Height (mm)	475
Product type	Lathe
Weight (Kg)	125